



**NKODA™**  
**WE ARE PPF**

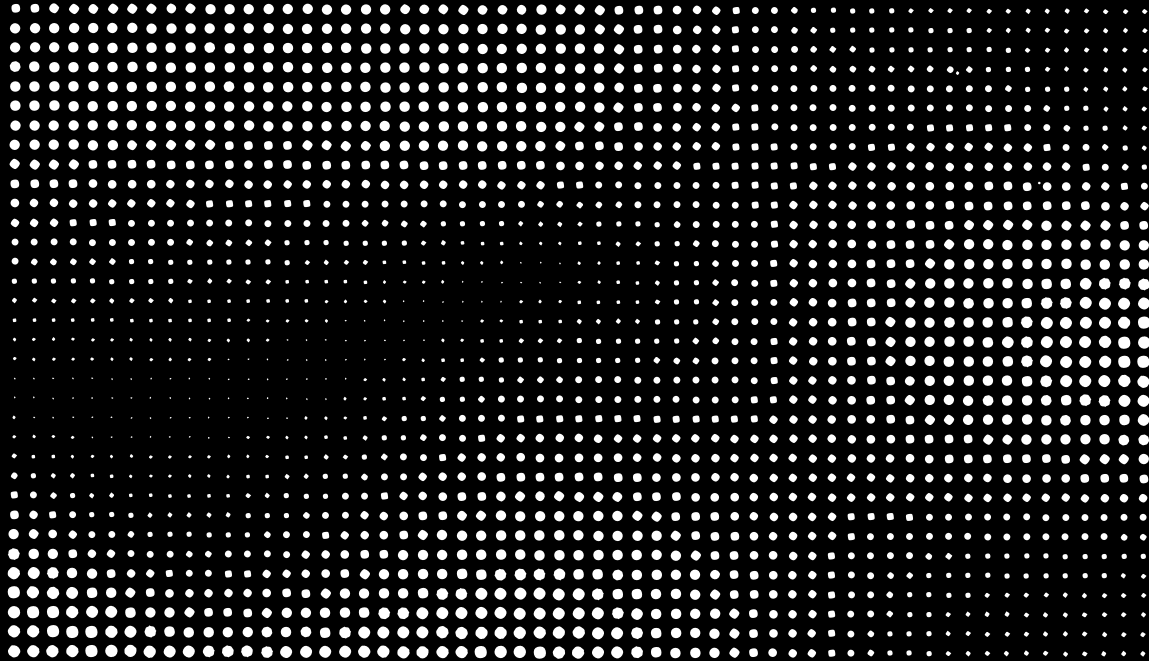

# Product Specifications


**NKODAGLOBAL.COM**

**NKODA.SHOP**

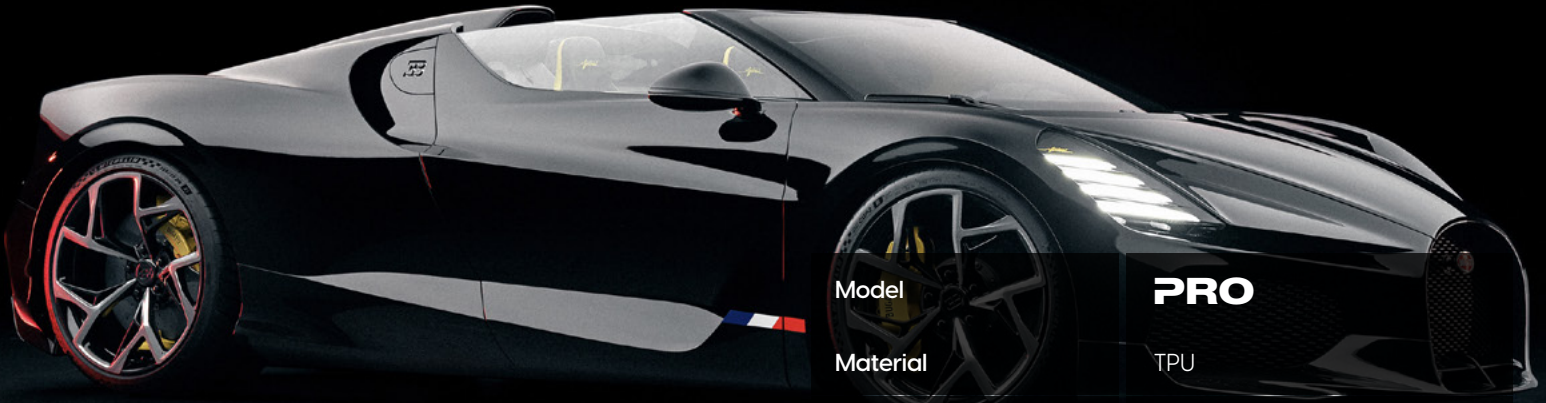

**IMPACT SERIES**  
**PRO**

- Ultra Gloss Enhancing
- Self-Healing W/Heat
- Non-Yellowing
- Mid-initial Tack
- Max Stretchability

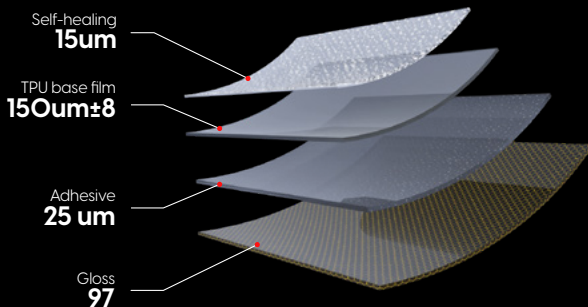


|   |   |              |
|---|---|--------------|
| Model                                   | <b>PRO</b>  |              |
| Material                                | TPU   |              |
| Effect                                  | High Gloss  |              |
| Size                                    | 60" x 50' · 1.52*15M                                    |              |
| Warranty Coverage                       | Yellowing, Staining, Cracking, Blistering, Delaminating |              |
| Thickness                               | 8 mil / 200 UM  |              |
| Self-Healing Thickness                  | 15 UM   |              |
| Base Film Thickness                     | 150um±8   |              |
| Adhesive Thickness                      | 25 UM   |              |
| Gloss                                   | 97  |              |
| Tensile Strength                        | 33.9Mpa   |              |
| Tear Strength                           | 65.1 KN/m   |              |
| Elongation at Break                     | ≥430%   |              |
| 100% Modulus                            | 6.9Mpa  |              |
| Anti-yellowing                          | ΔE< 1   |              |
| Hydrophobic Property                    | >R10  |              |
| Peeling Force of Acrylic Adhesive layer | 20min   | 24h          |
|   | 937 gf/inch   | 1498 gf/inch |
| Durability                              | Zone 1  | Zone 2       |
|   | Lifetime  | Lifetime     |



|                   |   |
|-------------------|---|
| Model             | <b>PRO WIDE</b>   |
| Material          | TPU   |
| Effect            | High Gloss  |
| Size              | 1.83*15M  |
| Warranty Coverage | Yellowing, Staining, Cracking, Blistering, Delaminating |

**IMPACT SERIES**  
**PRO WIDE**

- Ultra Gloss Enhancing
- Self-Healing W/Heat
- Non-Yellowing
- Mid-initial Tack
- Max Stretchability

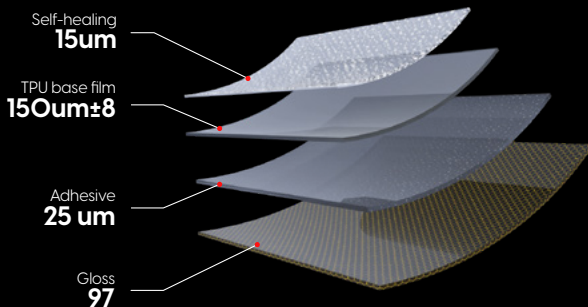


|   |                |              |
|---|----------------|--------------|
| Thickness                               | 8 mil / 200 UM |              |
| Self-Healing Thickness                  | 15 UM          |              |
| Base Film Thickness                     | 150um±8        |              |
| Adhesive Thickness                      | 25 UM          |              |
| Gloss                                   | 97             |              |
| Tensile Strength                        | 33.9Mpa        |              |
| Tear Strength                           | 65.1 KN/m      |              |
| Elongation at Break                     | ≥430%          |              |
| 100% Modulus                            | 6.9Mpa         |              |
| Anti-yellowing                          | ΔE< 1          |              |
| Hydrophobic Property                    | >R10           |              |
| Peeling Force of Acrylic Adhesive layer | 20min          | 24h          |
|   | 937 gf/inch    | 1498 gf/inch |
| Durability                              | Zone 1         | Zone 2       |
|   | Lifetime       | Lifetime     |



**IMPACT SERIES**  
**FORCE**

- Self-Healing W/Heat
- Non-Yellowing
- Low-initial Tack
- Good Stretchability

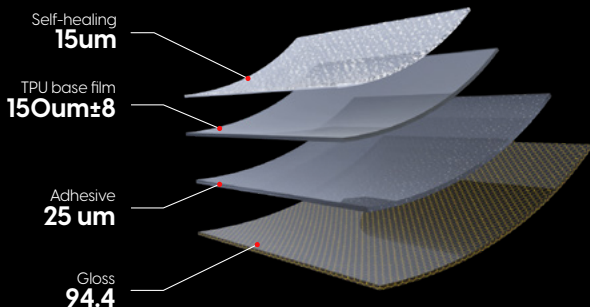


|   |   |               |
|---|---|---------------|
| Model                                   | <b>FORCE</b>  |               |
| Material                                | TPU   |               |
| Effect                                  | High Gloss  |               |
| Size                                    | 1.52*15M  |               |
| Warranty Coverage                       | Yellowing, Staining, Cracking, Blistering, Delaminating |               |
| Thickness                               | 7.5 mil / 190 UM  |               |
| Self-Healing Thickness                  | 15 UM   |               |
| Base Film Thickness                     | 150um±8   |               |
| Adhesive Thickness                      | 25 UM   |               |
| Gloss                                   | 94.6  |               |
| Tensile Strength                        | 23.66Mpa  |               |
| Tear Strength                           | 86.1KN/m  |               |
| Elongation at Break                     | ≥325%   |               |
| 100% Modulus                            | 9.14Mpa   |               |
| Anti-yellowing                          | ΔE< 1.2   |               |
| Hydrophobic Property                    | >R10  |               |
| Peeling Force of Acrylic Adhesive layer | 20min   | 24h           |
|   | 1272 gf /inch   | 2525 gf /inch |
| Durability                              | Zone 1  | Zone 2        |
|   | 5 Years   | 3 Years       |



|                   |   |
|-------------------|---|
| Model             | <b>OFF-ROAD<sup>12</sup></b>                            |
| Material          | TPU   |
| Effect            | High Gloss  |
| Size              | 1.52*15M  |
| Warranty Coverage | Yellowing, Staining, Cracking, Blistering, Delaminating |

**IMPACT SERIES**  
**OFF-ROAD<sup>12</sup>**

- Ultra Gloss Enhancing
- Self-Healing W/Heat
- Non-Yellowing
- Mid-initial Tack

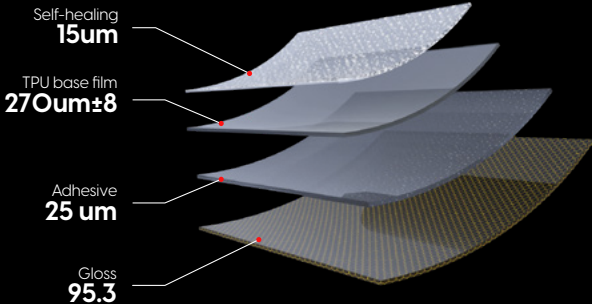


|   |                 |              |
|---|-----------------|--------------|
| Thickness                               | 12 mil / 300 UM |              |
| Self-Healing Thickness                  | 15 UM           |              |
| Base Film Thickness                     | 270um±8         |              |
| Adhesive Thickness                      | 25 UM           |              |
| Gloss                                   | 95.3            |              |
| Tensile Strength                        | 21.7Mpa         |              |
| Tear Strength                           | 72.3 KN/m       |              |
| Elongation at Break                     | ≥400%           |              |
| 100% Modulus                            | 9.14Mpa         |              |
| Anti-yellowing                          | ΔE< 1.2         |              |
| Hydrophobic Property                    | R9-R10          |              |
| Peeling Force of Acrylic Adhesive layer | 20min           | 24h          |
|   | 1783 gf/inch    | 2325 gf/inch |
| Durability                              | Zone 1          | Zone 2       |
|   | 10 Years        | 7 Years      |

**NKODA™**



**IMPACT SERIES**  
**SATIN**

- Self-Healing W/Heat
- Non-Yellowing
- Mid-initial Tack
- Excellent Stretchability

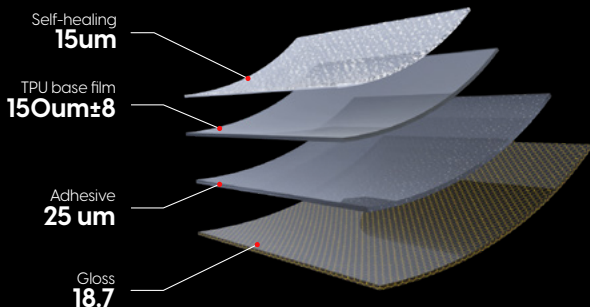

|   |   |              |
|---|---|--------------|
| Model                                   | <b>SATIN</b>  |              |
| Material                                | TPU   |              |
| Effect                                  | High Gloss  |              |
| Size                                    | 1.52*15M  |              |
| Warranty Coverage                       | Yellowing, Staining, Cracking, Blistering, Delaminating |              |
| Thickness                               | 7.5 mil / 190 UM  |              |
| Self-Healing Thickness                  | 15 UM   |              |
| Base Film Thickness                     | 150um±8   |              |
| Adhesive Thickness                      | 25 UM   |              |
| Gloss                                   | 18.7  |              |
| Tensile Strength                        | 23.66Mpa  |              |
| Tear Strength                           | 60.3 KN/m   |              |
| Elongation at Break                     | ≥375%   |              |
| 100% Modulus                            | 23.7Mpa   |              |
| Anti-yellowing                          | ΔE< 1.5   |              |
| Hydrophobic Property                    | R9-R10  |              |
| Peeling Force of Acrylic Adhesive layer | 20min   | 24h          |
|   | 2144 gf/inch  | 2378 gf/inch |
| Durability                              | Zone 1  | Zone 2       |
|   | 10 Years  | 7 Years      |


**NKODA™**



**VAPOR**  
HEAD/TAIL LIGHT

**30%**  
**50%**  
**70%**

- Simple to install Headlight and Taillight Film

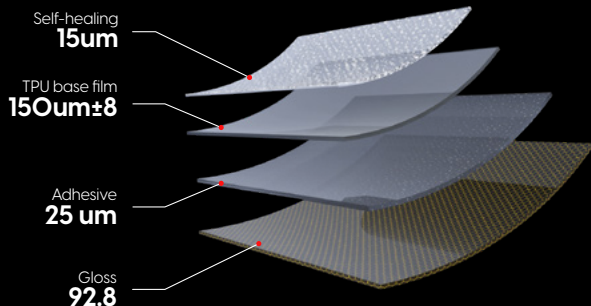


|   |   |              |
|---|---|--------------|
| Model                                   | <b>VAPOR</b>  |              |
| Material                                | TPU   |              |
| Effect                                  | High Gloss  |              |
| Size                                    | 1.52*15M / 0.76*15M                                     |              |
| Warranty Coverage                       | Yellowing, Staining, Cracking, Blistering, Delaminating |              |
| Thickness                               | 8 mil / 200 UM  |              |
| Self-Healing Thickness                  | 15 UM   |              |
| Base Film Thickness                     | 150um±8   |              |
| Adhesive Thickness                      | 25 UM   |              |
| Gloss                                   | 92.8  |              |
| Tensile Strength                        | 24.1 Mpa  |              |
| Tear Strength                           | 58.4 KN/m   |              |
| Elongation at Break                     | ≥350%   |              |
| 100% Modulus                            | 6.7 Mpa   |              |
| Anti-yellowing                          | ΔE< 1.5   |              |
| Hydrophobic Property                    | R9-R10  |              |
| Peeling Force of Acrylic Adhesive layer | 20min   | 24h          |
|   | 1152 gf/inch  | 1848 gf/inch |
| Durability                              | Zone 1  | Zone 2       |
|   | 10 years  | 7 years      |



FIRST  
23  
AVAILABLE  
NOW

# VIBE

NANO  
COLOR  
PPF

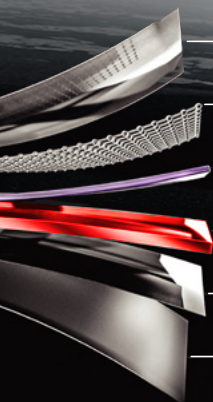

- PET Liner
- Self-healing Top-Coat
- Nano ceramic pigment super dispersed complex layer
- TrueFusion™** TPU color base
- Adhesive Layer
- Nano Coated PET Release Film

- Extreme stretchability without color distortion
- 10 Year Warranty
- 50+ Color Catalog Coming Soon...

## Shades



## Classics



## Specialty *Iridescent*



**VIBE** NANO  
COLOR  
PPF